
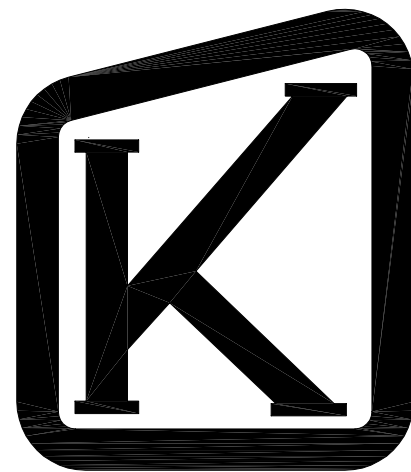
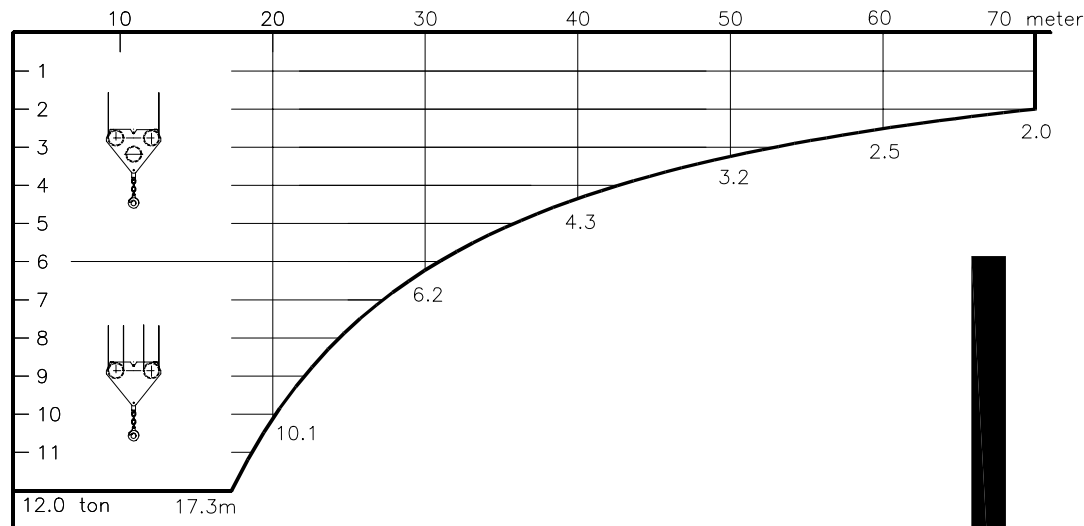


# TECHNICAL DATA

# K-260E

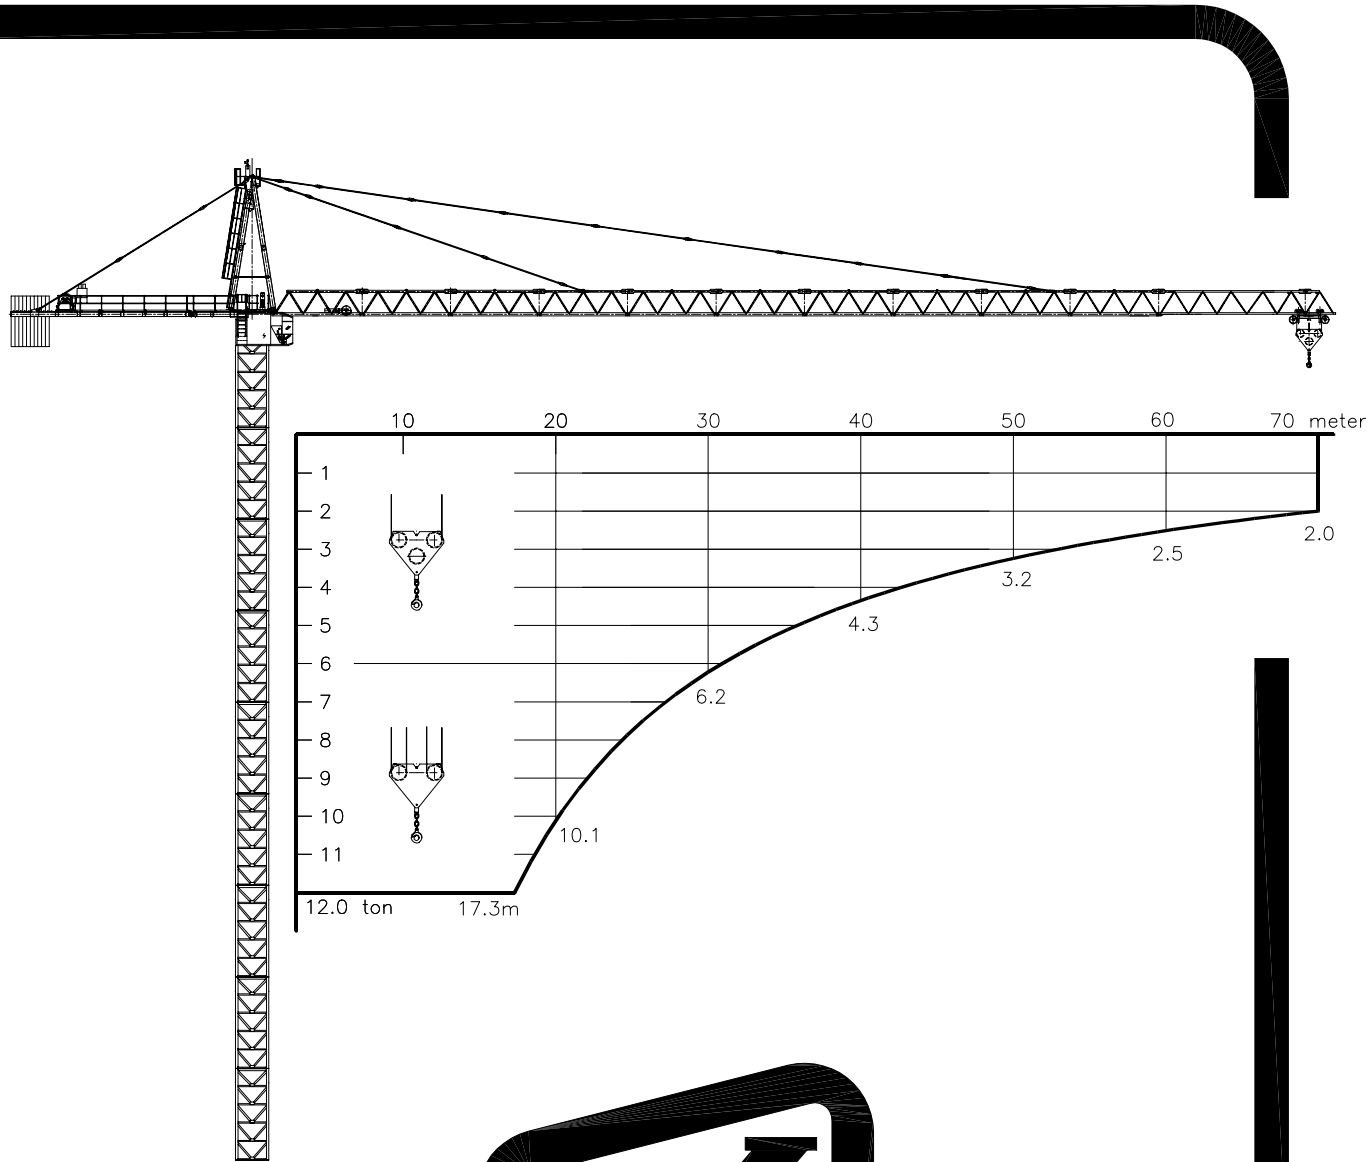

⚡	3 x 400 V - 50 Hz	CONTROL VOLTAGE / STEUER SPANNUNG
	3 x 440 V - 60 Hz	24 VDC - 220 VAC

HOIST WINCH / HUBWERK	56 kW	81 kW
POWER CONSUMPTION/STROMVERBRAUCH	96 kVA	125 kVA
FUSE / SICHERUNG	125 Amps	225 Amps
POWER CABLE / HAUPTKABEL	0-100 m	4G50
	100-175 m	4G70
	175-250 m	4G95


🏗️	0-3000 kg	0 - 84 m/min	0 - 120 m/min
	0-6000 kg	0 - 50 m/min	0 - 70 m/min

🏗️	0-6000 kg	0 - 42 m/min	0 - 60 m/min
	0-12000 kg	0 - 25 m/min	0 - 35 m/min

🏗️	2 x 5 kW	MAX JIB MAX AUSLEGER	0 - 0.6 RPM
🏗️	7.1 kW	12 t	0 - 70 m/min
🏗️	4 x 5 kW	F <sub>max</sub>	25 m/min

HOIST ROPE / HUB-SEIL	ø17 mm - FILL FACTOR 0.65 - 1770 MPa BREAKING STRESS	
🏗️	56 kW HOIST WINCH: 400 m	81 kW HOIST WINCH: 450 m
	>400 m *	>450 m *
TROLLEY ROPE / LAUFKATZE-SEIL	ø10 mm - FILL FACTOR 0.65 - 1770 MPa BREAKING STRESS / BRUCHSPANNUNG	

\* CONSULT KRØLL CRANES A/S - NEHMEN SIE MIT KRØLL CRANES A/S KONTAKT AUF

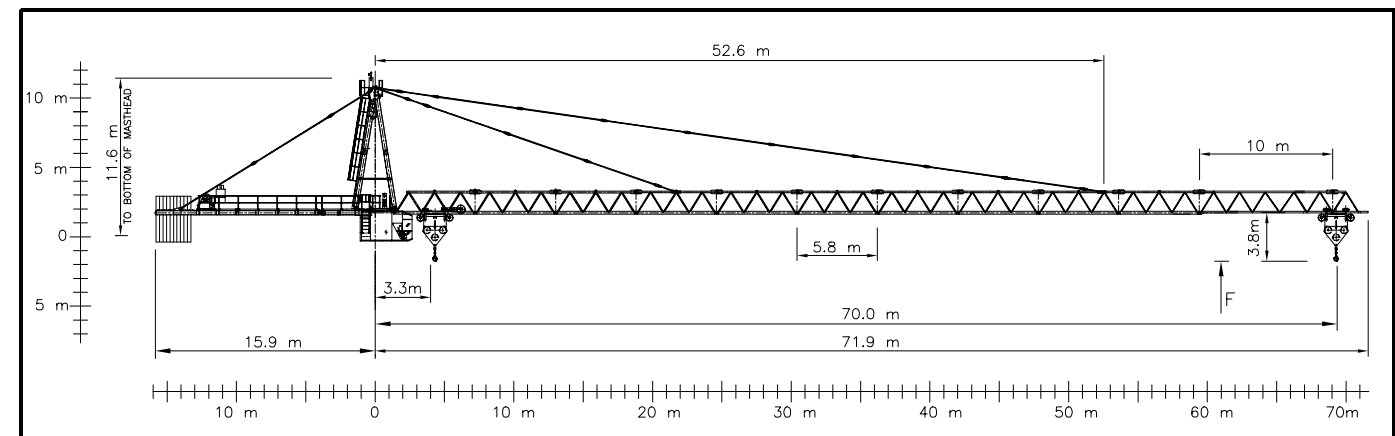

APPROX. ERECTION WEIGHTS / UNGEFÄHRE MONTAGEGEWICHTE

L	kg	POS	ITEM	kg	POS	ITEM	kg
70	11300	1	OUTER STAY	1850	9	CABIN	2100
60	10790	2	INNER STAY	830	10	M22-1	2550
54	10020	3	TOP TOWER	3290	11	MO22-1	2740
48	9060	4	REAR STAY	640	12	M22-2	4010
42	8290	5	HOIST WINCH	1710	13	B22-1, 6m	7675
36	7645	6	REAR JIB	3035	14	B22-2, 6m	10500
31	7180	7	SLEWING	5650	15	N22-2	1350
		8	MAST HEAD	2500	16	CT22	9000

**EXTRA EQUIPMENT AVAILABLE**  
WALL TIE FRAMES, CABLE DRUMS, CURVE RUNNING AND 90° TURN BOGIES, ELEVATOR, FLOOD LIGHTING

**ZUSÄTZLICHE AUSRÜSTUNG VERFÜGBAR**  
EINSPANNRAHMEN, KABELTROMMEL, KURVENFAHRENDE UND 90° DREHSCHEMEL, AUFZUG, SCHEINWERFER

THE DESIGN AND TECHNICAL SPECIFICATIONS GIVEN ARE APPLICABLE TO THE STANDARD MACHINE OF CRANE K-260E. MODIFICATIONS ACCORDING TO SPECIAL REQUIREMENTS REGARDING FOR EXAMPLE HOOK HEIGHT, JIB LENGTH, RAIL GAUGE, ETC.. ARE AVAILABLE. PLEASE CONTACT KRØLL CRANES A/S.

DIE KONSTRUKTIONS- UND TECHNISCHE DATEN BEZIEHEN SICH AUF DIE STANDARDAUSFÜHRUNG DES KRANTYPS K-260E. INDIVIDUELLE FORDERUNGEN Z.B AN HAKENHÖHE, AUSLEGERLÄNGE, SPURWEITE USW. KÖNNEN BERÜCKSICHTIGT WERDEN. NEHMEN SIE MIT KRØLL CRANES A/S KONTAKT AUF.

## KRØLL CRANES A/S

Nordkranvej 2 · DK-3540 Lyngge · Denmark · Phone: +45 48 187400 · Fax: +45 48 188807

E-mail: krollcranes@krollcranes.dk · www.krollcranes.com

CONVERSION OF THE UNITS FOR FORCES / UMRECHNUNG DER EINHEITEN FÜR KRÄFTE	10 N = 1 kg 10 kN = 1 ton	SUBJECT TO ALTERATIONS / ÄNDERUNGEN VORBEHALTEN	F.E.M.	DATA SHEET / DATABLATT	K-260E 010401
--	------------------------------	---	--------	------------------------	------------------