




KROLL CRANES

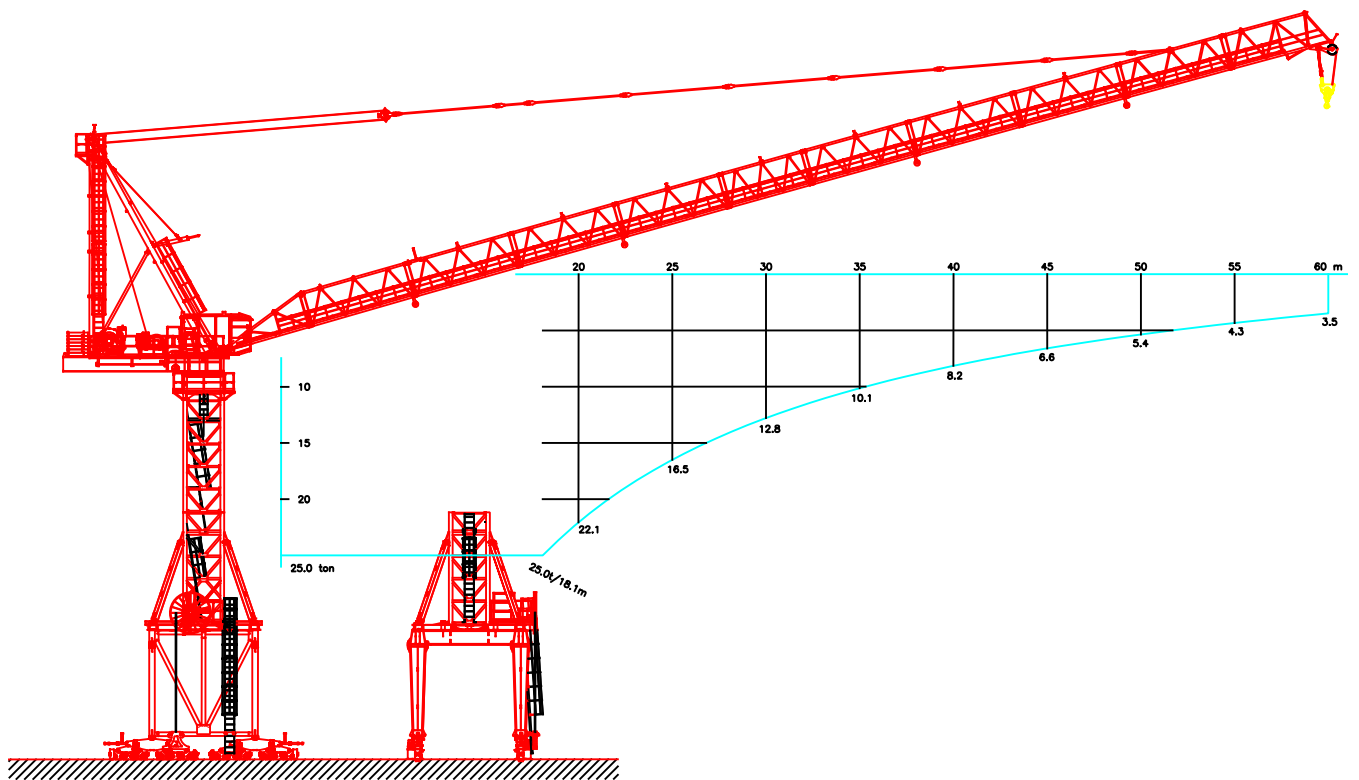

→ **25 tonnes Max Load**

This model is also available with:

36 tonnes Load Chart














F.E.M 1.001-HC1/A3/E3



LUFFING BOOM TOWER CRANE


K500L

25 tonnes Max Load

HOIST WINCH MOTOR 85 kW	2-PARTS 			
		Load 0 - 6.0 t 6.0 - 12.0 t 12.0 - 25.0 t	Max. Speed 53 m/min 32 m/min 18 m/min	
	HOIST DRUM		HOIST WIRE	
	CAPACITY 500 m / 6 layers		Diameter 32 mm	Safety Factor 4.7
	LUFFING WINCH MOTOR 45 kW			LUFFING DRUM CAPACITY 200 m / 4 Layer
	LUFFING SPEEDS			LUFFING WIRE
	Full Load	2:00 min:sec	Diameter 24 mm	Safety Factor 5
	SLEW DRIVE Motor 2 x 11 kW			POWER SUPPLY 3 x 400 - 480 V, 50/60 Hz
	SLEW SPEEDS			Consumption 200 kVA
	0 - 25 t	0 - 0.6 rpm	Main Fuse 250 A	Recommended Generator Size 400 kVA
	UNDERCARRIAGE Motor 2 x 5.5kW			SUPPLY CABLE
	TRAVEL SPEEDS			Cable Length 0 - 120 m
	0 - 25 t	0 - 15 m/min		
All motion controls are completely stepless ensuring smooth and jerk-free operation. Creeping speed down to 0.5% of maximum speed.			All specifications shown in the tables are for the standard version of K500L. For special requirements regarding load charts or drive speeds, please contact Krøll Cranes A/S.	



KRØLL CRANES

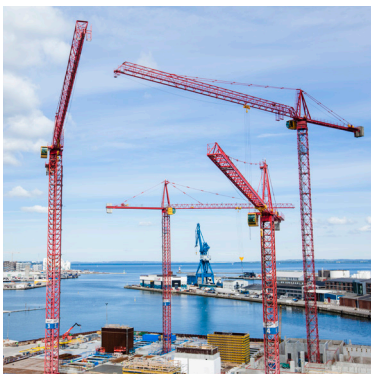

KRØLL CRANES A/S
Nordkranvej 2
DK-3540 Lyngø
Denmark

Tel: +45 48 18 74 00
Mail: info@krollcranes.dk
Web: www.krollcranes.dk

